



- △ Classical COB LED ceiling lights upgraded with diamond lens.
- △ High purity cool forging aluminum housing with fine paint finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ Adjustable front 90 degree vertical angle turning, easy installation.
- △ Professional optical lens brings excellent focusing light beam.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(24W luminous intensity and lux distribution diagrams)

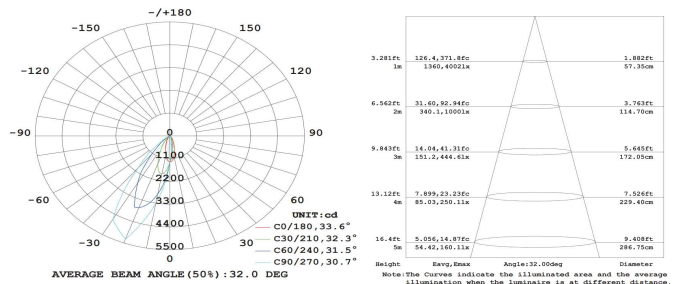


Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL015007	Ø90x50mm	Ø75mm	7W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	650LM
CL-DL015012	Ø108x65mm	Ø95mm	12W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	1100Lm
CL-DL015024	Ø138x80mm	Ø120mm	24W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	2200Lm
CL-DL015030	Ø160x95mm	Ø145mm	30W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	2700Lm



- △ Deep anti-glare high end ceiling spot light with big optical lens.
- △ High purity cool forging aluminum housing with fine paint finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ Light designer COB optical lens gives outstanding focusing beam.
- △ Adjustable front 90 degree vertical angle turning, easy installation.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(18W luminous intensity and lux distribution diagrams)

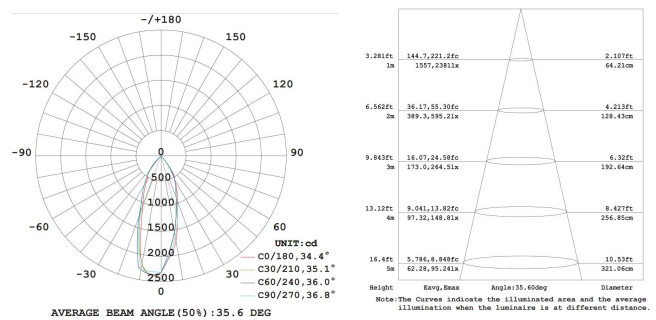

Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL016007	Ø68x95mm	Ø57mm	7W	24°/36°	>0.90	>80/90	No	90-350VAC	650LM
CL-DL016012	Ø90x100mm	Ø75mm	12W	24°/36°	>0.90	>80/90	No	90-350VAC	1100LM
CL-DL016018	Ø110x130mm	Ø95mm	18W	24°/36°	>0.90	>80/90	No	90-350VAC	1650LM