



- △ Simple but useful design, high competitive SMD LED downlight series.
- △ Screw connection for aluminum front and heat sink, perfect finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ Different front colors and designs to meet home decoration projects.
- △ PC cover and reflecting paper in side, ensure beautiful light output.
- △ Bridgelux chips SMD inside, high Ra>80, high lumen 150Lm/W.
- △ SMD LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(24W luminous intensity and lux distribution diagrams)

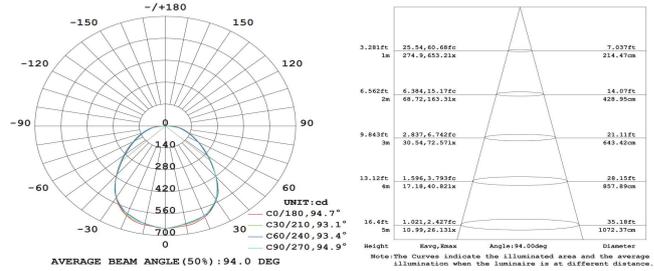


Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL001005	Ø100x55mm	Ø70mm	5W	100°	>0.90	>80	No	90-350VAC	550Lm
CL-DL001007	Ø110x55mm	Ø80mm	7W	100°	>0.90	>80	No	90-350VAC	750LM
CL-DL001009	Ø120x60mm	Ø90mm	9W	100°	>0.90	>80	No	90-350VAC	950LM
CL-DL001012	Ø145x60mm	Ø110mm	12W	100°	>0.90	>80	No	90-350VAC	1300Lm
CL-DL001018	Ø185x65mm	Ø145mm	18W	100°	>0.90	>80	No	90-350VAC	1900Lm
CL-DL001024	Ø190x75mm	Ø160mm	24W	100°	>0.90	>80	No	90-350VAC	2500Lm

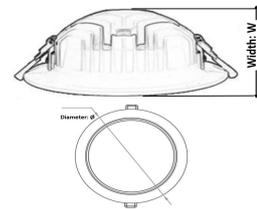

- △ Totally new and fashion design, internal driver, SMD LED downlight.
- △ Whole united die casting aluminum housing, delicated paint finishing.
- △ Excellent ventilation to dissipate heat fastly that ensures stable working.
- △ Half-round back PC driver box, high end springs and strong cable out.
- △ PC diffusor and reflecting paper in side, ensure beautiful light output.
- △ Bridgelux chips SMD inside, high Ra>80, high lumen 150Lm/W.
- △ SMD LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(24W luminous intensity and lux distribution diagrams)

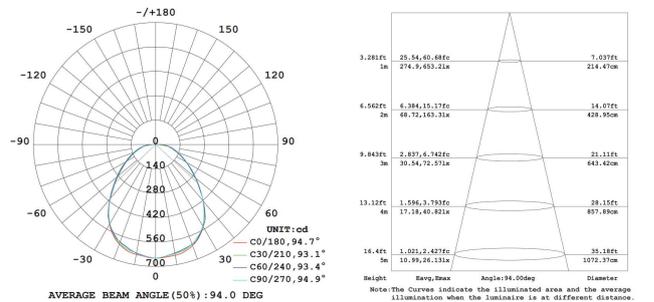

Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL002012	Ø145x65mm	Ø125mm	12W	100°	>0.90	>80	No	90-350VAC	1300Lm
CL-DL002018	Ø175x55mm	Ø155mm	18W	100°	>0.90	>80	No	90-350VAC	1900LM
CL-DL002024	Ø195x70mm	Ø175mm	24W	100°	>0.90	>80	No	90-350VAC	2500LM
CL-DL002036	Ø230x70mm	Ø210mm	36W	100°	>0.90	>80	No	90-350VAC	3800Lm