



- △ Innovative high end design COB LED pendant downlight series.
- △ High purity lathe aluminum housing with fine paint finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ Deep anti-glare optical reflector gives outstanding focusing beam.
- △ Designer options for electro-plated color cup, black, nickel, gold, silver.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(12W luminous intensity and lux distribution diagrams)

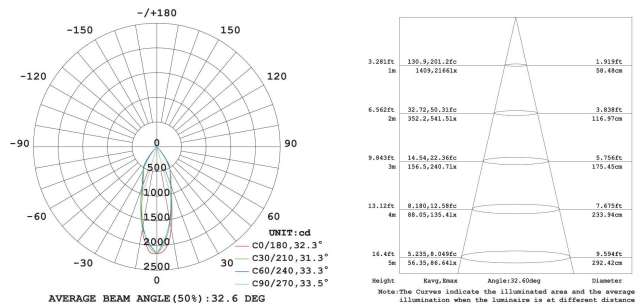


Model	Size	Cable	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL037006	Ø60x300mm	1000mm	6W	24°/36°	>0.90	>80/90	No	90-350VAC	550LM
CL-DL037012	Ø80x300mm	1000mm	12W	24°/36°	>0.90	>80/90	No	90-350VAC	1100LM
CL-DL037024	Ø100x300mm	1000mm	24W	24°/36°	>0.90	>80/90	No	90-350VAC	2200LM
CL-DL037030	Ø120x300mm	1000mm	30W	24°/36°	>0.90	>80/90	No	90-350VAC	2700LM



- △ COB LED pendant light with acrylic diffuser for atmosphere lighting.
- △ High purity lathe aluminum housing with fine paint finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ Acrylic plus with optical lens gives outstanding light performance.
- △ Excellent lamp body treatment and finishing, creative design product.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(luminous intensity and lux distribution diagrams)

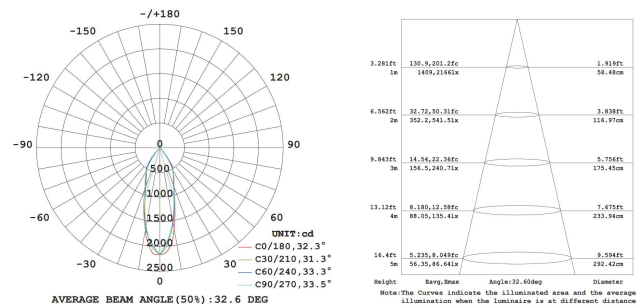

Model	Size	Cable	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL038012	Ø120x275mm	1000mm	12W	24°/36°	>0.90	>80/90	No	90-350VAC	1100LM