




XLL CE RoHS

| Model | Size | Cut Hole | Power | Lumen |
|--------------|-----------|----------|-------|--------|
| XLL-DL001007 | Ø90x52mm | Ø75mm | 7W | 600Lm |
| XLL-DL001010 | Ø130x52mm | Ø105mm | 10W | 850Lm |
| XLL-DL001015 | Ø160x52mm | Ø145mm | 15W | 1300Lm |
| XLL-DL001020 | Ø185x55mm | Ø160mm | 20W | 1700Lm |
| XLL-DL001030 | Ø220x58mm | Ø200mm | 30W | 2550Lm |

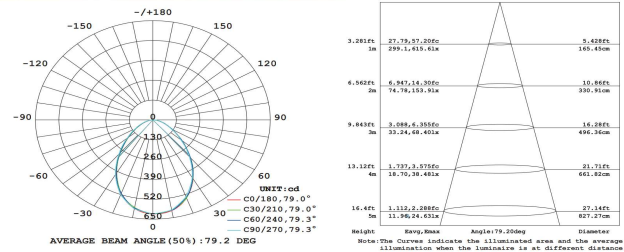


(30W luminous distribution and lux intensity diagrams)
 △ Die-casting aluminum housing, excellent cooling and nice design.
 △ Latest flip COB LED technology, high lumen output, Ra>70.
 △ External constant current driver, no flickering, PF>0.6, 175-265VAC.
 △ Reliable quality and stable performance, low heat, low light decay.
 △ 35,000 hours lifespan, eco-friendly-material, >80% power saving.



XLL CE RoHS

| Model | Size | Cut Hole | Power | Lumen |
|--------------|-----------|----------|-------|--------|
| XLL-DL002007 | Ø90x52mm | Ø75mm | 7W | 600Lm |
| XLL-DL002010 | Ø130x52mm | Ø105mm | 10W | 850Lm |
| XLL-DL002015 | Ø160x52mm | Ø145mm | 15W | 1300Lm |
| XLL-DL002020 | Ø185x55mm | Ø160mm | 20W | 1700Lm |
| XLL-DL002030 | Ø220x58mm | Ø200mm | 30W | 2550Lm |

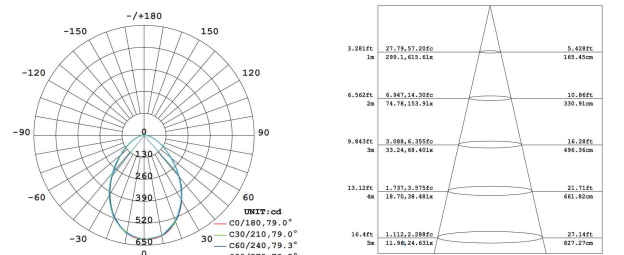


(30W luminous distribution and lux intensity diagrams)
 △ Die-casting aluminum housing, excellent cooling and nice design.
 △ Latest flip COB LED technology, high lumen output, Ra>70.
 △ External constant current driver, no flickering, PF>0.6, 175-265VAC.
 △ Reliable quality and stable performance, low heat, low light decay.
 △ 35,000 hours lifespan, eco-friendly-material, >80% power saving.



XLL CE RoHS

| Model | Size | Cut Hole | Power | Lumen |
|--------------|-----------|----------|-------|--------|
| XLL-DL003007 | Ø90x52mm | Ø75mm | 7W | 600Lm |
| XLL-DL003010 | Ø130x52mm | Ø105mm | 10W | 850Lm |
| XLL-DL003015 | Ø160x52mm | Ø145mm | 15W | 1300Lm |
| XLL-DL003020 | Ø185x55mm | Ø160mm | 20W | 1700Lm |
| XLL-DL003030 | Ø220x58mm | Ø200mm | 30W | 2550Lm |

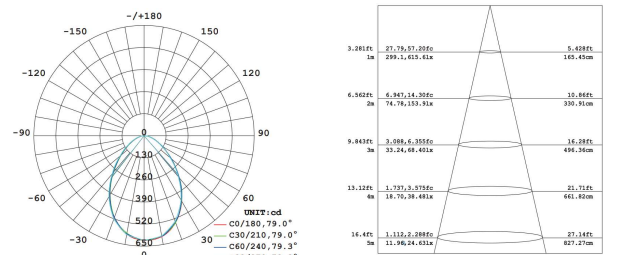


(30W luminous distribution and lux intensity diagrams)
 △ Die-casting aluminum housing, excellent cooling and nice design.
 △ Latest flip COB LED technology, high lumen output, Ra>70.
 △ External constant current driver, no flickering, PF>0.6, 175-265VAC.
 △ Reliable quality and stable performance, low heat, low light decay.
 △ 35,000 hours lifespan, eco-friendly-material, >80% power saving.



XLL CE RoHS

| Model | Size | Cut Hole | Power | Lumen |
|--------------|-----------|----------|-------|--------|
| XLL-DL004007 | Ø90x52mm | Ø75mm | 7W | 600Lm |
| XLL-DL004015 | Ø160x52mm | Ø145mm | 15W | 1300Lm |
| XLL-DL004030 | Ø220x58mm | Ø200mm | 30W | 2550Lm |

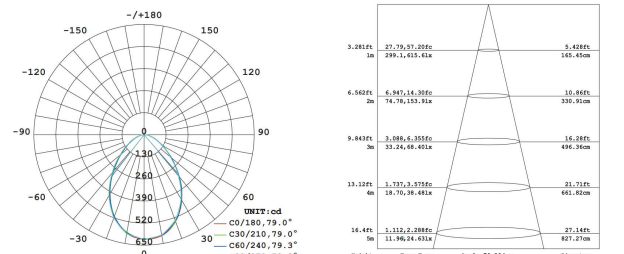

(30W luminous distribution and lux intensity diagrams)
 △ Die-casting aluminum housing, excellent cooling and nice design.
 △ Latest flip COB LED technology, high lumen output, Ra>70.
 △ External constant current driver, no flickering, PF>0.6, 175-265VAC.
 △ Reliable quality and stable performance, low heat, low light decay.
 △ 35,000 hours lifespan, eco-friendly-material, >80% power saving.