



- △ Deep anti-glare design SMD LED downlight series with full sizes.
- △ Thickening die-casting aluminum housing with fine paint finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ Creative anti-glare cup, forsted silver gray color, brings nice light .
- △ PC cover and reflecting paper in side, ensure beautiful light output.
- △ Bridgelux chips SMD inside, high Ra>80, high lumen 150Lm/W.
- △ SMD LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(24W luminous intensity and lux distribution diagrams)

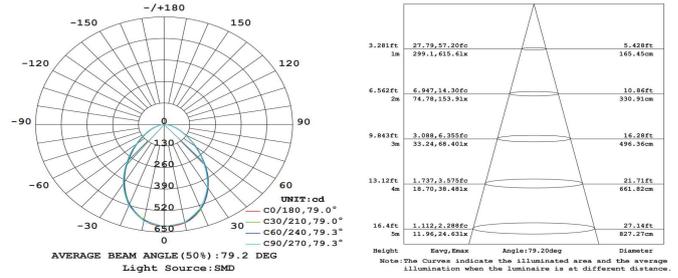


Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL003007	Ø85x45mm	Ø75mm	7W	80°	>0.90	>80	No	90-350VAC	750LM
CL-DL003012	Ø105x60mm	Ø90mm	12W	80°	>0.90	>80	No	90-350VAC	1300LM
CL-DL003018	Ø130x80mm	Ø110mm	18W	80°	>0.90	>80	No	90-350VAC	1900Lm
CL-DL003024	Ø185x100mm	Ø160mm	24W	80°	>0.90	>80	No	90-350VAC	2500Lm
CL-DL003036	Ø220x110mm	Ø195mm	36W	80°	>0.90	>80	No	90-350VAC	3800Lm

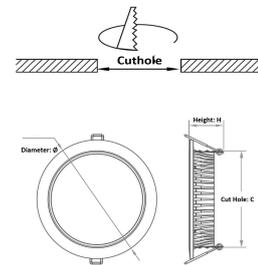

- △ High end, robust and durable SMD LED downlight full size series.
- △ Pure die casting aluminum housing, delicated electro-plated finishing.
- △ Excellent ventilation to dissipate heat fastly that ensures stable working.
- △ Specially used in high end engineering projects such as hotel and vila.
- △ PC diffusor and reflecting paper in side, ensure beautiful light output.
- △ Bridgelux chips SMD inside, high Ra>80, high lumen 150Lm/W.
- △ SMD LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(24W luminous intensity and lux distribution diagrams)

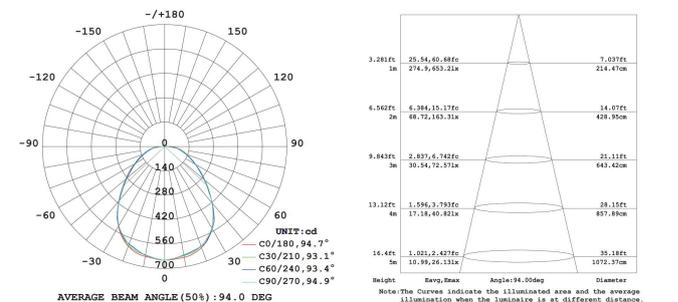

Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL004009	Ø113x58mm	Ø95mm	9W	100°	>0.90	>80	No	90-350VAC	950Lm
CL-DL004015	Ø148x65mm	Ø128mm	15W	100°	>0.90	>80	No	90-350VAC	1600LM
CL-DL004018	Ø160x65mm	Ø140mm	18W	100°	>0.90	>80	No	90-350VAC	1900LM
CL-DL004024	Ø190x65mm	Ø160mm	24W	100°	>0.90	>80	No	90-350VAC	2500Lm
CL-DL004040	Ø230x85mm	Ø200mm	40W	100°	>0.90	>80	No	90-350VAC	4200LM