



- △ High end, robust and durable COB LED downlight rotatable head.
- △ Thickening die-casting aluminum housing with fine paint finishing.
- △ Excellent ventilation to dissipate heat fastly that ensures stable working.
- △ Vertical 90 degree rotatable form, used as centralizing spot lights.
- △ Tempered glass cover, high end reflector, excellent light performance.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(24W luminous intensity and lux distribution diagrams)

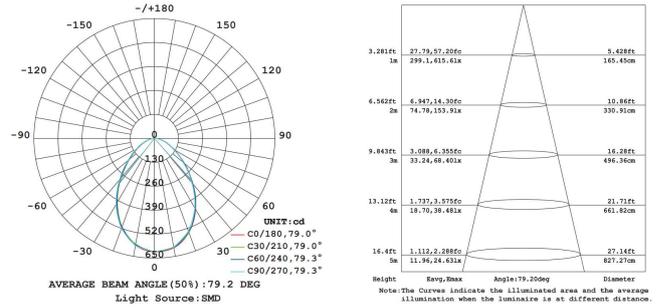


Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL007007	Ø85x75mm	Ø75mm	7W	80°	>0.90	>80/90	No	90-350VAC	650Lm
CL-DL007012	Ø100x90mm	Ø85mm	12W	80°	>0.90	>80/90	No	90-350VAC	1100LM
CL-DL007018	Ø140x105mm	Ø120mm	18W	80°	>0.90	>80/90	No	90-350VAC	1750LM
CL-DL007024	Ø175x135mm	Ø145mm	24W	80°	>0.90	>80/90	No	90-350VAC	2250Lm

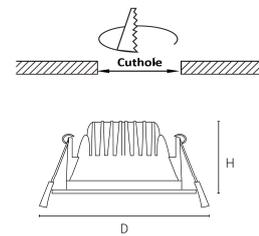

- △ Deep anti glare design COB LED downlight series with full sizes.
- △ Thickening die-casting aluminum housing with fine paint finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ Creative deep anti-glare design, forsted cover, protect eyes better.
- △ Quality light guid PC cover and mirror reflector, keep efficient light.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(24W luminous intensity and lux distribution diagrams)

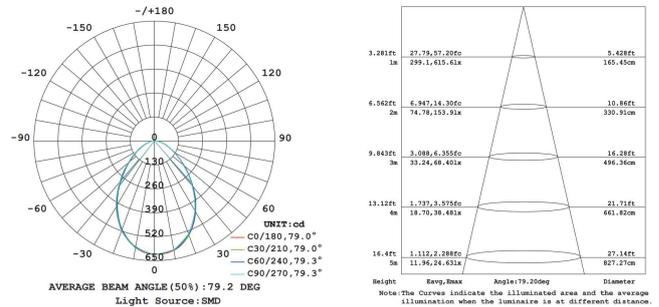

Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL008007	Ø90x53mm	Ø75mm	7W	80°	>0.90	>80/90	No	90-350VAC	600LM
CL-DL008012	Ø105x63mm	Ø90mm	12W	80°	>0.90	>80/90	No	90-350VAC	1100LM
CL-DL008018	Ø130x78mm	Ø115mm	18W	80°	>0.90	>80/90	No	90-350VAC	1650Lm
CL-DL008024	Ø165x98mm	Ø150mm	24W	80°	>0.90	>80/90	No	90-350VAC	2200Lm
CL-DL008030	Ø185x98mm	Ø170mm	30W	80°	>0.90	>80/90	No	90-350VAC	2700Lm
CL-DL008036	Ø220x98mm	Ø200mm	36W	80°	>0.90	>80/90	No	90-350VAC	3200Lm