



- △ United body anti glare full white color COB LED downlight all sizes.
- △ Thickening die-casting aluminum housing with fine paint finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ United anti-glare cup with forsted lens design, brings soft nice light .
- △ Lovely and high end appearance that fits most of lighting projects.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(24W luminous intensity and lux distribution diagrams)

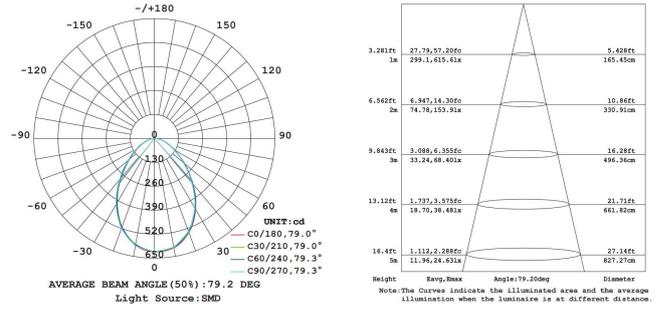


Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL009007	Ø90x52mm	Ø75mm	7W	80°	>0.90	>80/90	No	90-350VAC	600LM
CL-DL009012	Ø110x65mm	Ø95mm	12W	80°	>0.90	>80/90	No	90-350VAC	1100LM
CL-DL009018	Ø130x75mm	Ø115mm	18W	80°	>0.90	>80/90	No	90-350VAC	1650Lm
CL-DL009024	Ø165x90mm	Ø150mm	24W	80°	>0.90	>80/90	No	90-350VAC	2200Lm
CL-DL009030	Ø200x105mm	Ø180mm	30W	80°	>0.90	>80/90	No	90-350VAC	2700Lm
CL-DL009036	Ø230x115mm	Ø200mm	36W	80°	>0.90	>80/90	No	90-350VAC	3200Lm

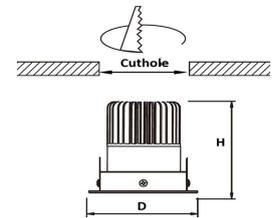

- △ Classical upgraded version COB LED downlight higher power.
- △ High purity cool forging aluminum housing with fine paint finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ High end aluminum honey comb design reflector brings nice beam.
- △ High tempered transparent glass cover, efficient light transmission.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(18W luminous intensity and lux distribution diagrams)

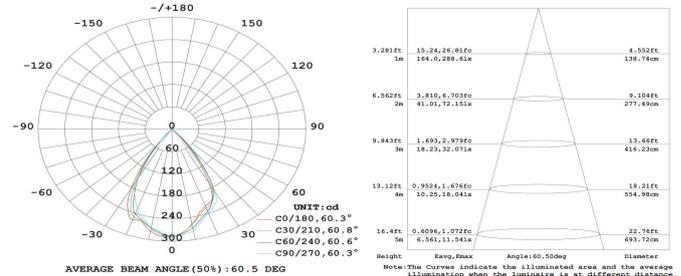

Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL010012	Ø73x90mm	Ø65mm	12W	60°	>0.90	>80/90	No	90-350VAC	1100LM
CL-DL010018	Ø100x95mm	Ø90mm	18W	60°	>0.90	>80/90	No	90-350VAC	1650LM
CL-DL010030	Ø120x120mm	Ø105mm	30W	60°	>0.90	>80/90	No	90-350VAC	2700Lm
CL-DL010050	Ø140x130mm	Ø135mm	50W	60°	>0.90	>80/90	No	90-350VAC	4500Lm