

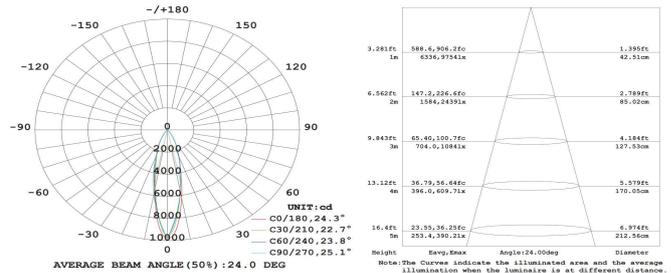


- △ High end cow eye ceiling spot light series with big optical lens.
- △ High purity cool forging aluminum housing with fine paint finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ 360 degree horizontal turning and 90 degree vertical turning.
- △ Professional optical lens brings excellent focusing light beam.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(30W luminous intensity and lux distribution diagrams)




Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL013012	Ø108x82mm	Ø100mm	12W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	1100Lm
CL-DL013024	Ø130x100mm	Ø120mm	24W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	2200Lm
CL-DL013030	Ø157x110mm	Ø146mm	30W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	2700Lm



- △ Super slim high end COB LED ceiling spotlight with big optical lens.
- △ High purity lathe aluminum housing with delicate paint finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ Light designer COB optical lens gives outstanding focusing beam.
- △ Adjustable front 90 degree vertical angle turning, easy installation.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(18W luminous intensity and lux distribution diagrams)

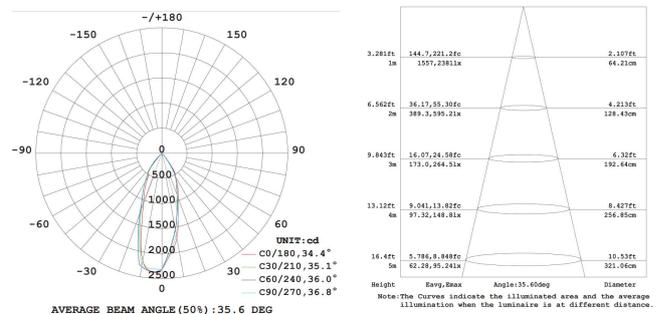

Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL014007	Ø90x40mm	Ø75mm	7W	24°/36°	>0.90	>80/90	No	90-350VAC	650LM
CL-DL014012	Ø108x48mm	Ø90mm	12W	24°/36°	>0.90	>80/90	No	90-350VAC	1100LM
CL-DL014018	Ø140x55mm	Ø120mm	18W	24°/36°	>0.90	>80/90	No	90-350VAC	1650LM